




Assembly instructions 2-Tier Locker

Tools needed: Socket wrench, 7/16 socket, 1/2 socket, 9/16 socket, 5/8 socket, rubber mallet, Phillips screw driver, 1/2 wrench.

Step 1. Lay cardboard down to protect your item. Next, insert all round, and square plugs.

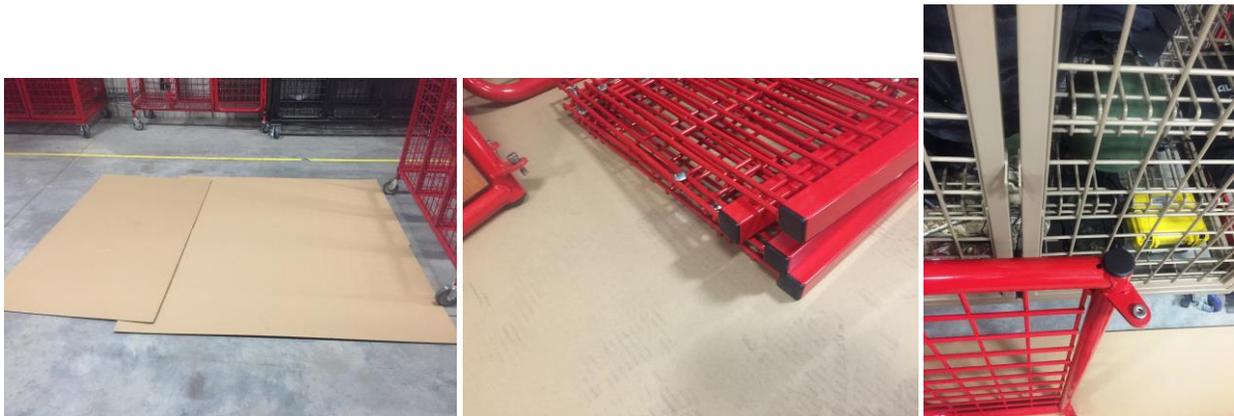

Step 2) Grab both 3-starts, and (6) 1/4-20x5-1/2" bolts, (6) 1/4" washers, (6) wedge nuts. Insert bolt and washer into locker channel and thread into wedge nut. Do these steps for both 3-starts. (Notice orientation of wedge nuts)



Step 3. You will place three side w/doors, and one side w/out door just over the bottom 3-start channels, Doing this will allow you to open up the sides and inserting the back panels into the holes of the side tube easier. (see photo) (All back panels will have tabs that will line up to side tube holes.) Do these steps for all sides and back panels. Now you can flush up the 3-start to the bottom of the side tubes using a rubber mallet, and tighten hardware. Insert top 3-start and tighten hardware. (see photo) (side w/doors will have (4) tabs for attaching door, side w/out door will have no tabs for doors).




Step 4. Attaching shelves. Grab (1) shelf, (4) 1"x5/16-8 carriage bolts, and (4) 5/16-18 nuts. Insert carriage bolt into shelf and through bracket, now thread on nut. Do these steps for all shelves. (There are (3) shelves per opening) Do not tighten hardware until all doors are installed. Leaving hardware loose will allow you some adjustability in the side panels for centering doors. Once your doors are centered you may now tighten hardware.




Step 5. Attaching locker doors to side tubes. First grab (4) .380 x .750 x .062 nylon washers and place them on the tabs of the side tubes. (See photo) Next grab (1) locker door and (2) 1/2" shoulder bolts and insert bolts through door tabs and attach door to side tube. (See photo) Next, grab (4) acorn nuts and thread onto shoulder bolts. (See photo) now tighten hardware. Do these steps for all doors.



Step 6. Attach striker bolt. Per side, grab (2) striker bolts and thread into side tube, then tighten striker bolts (see photo).

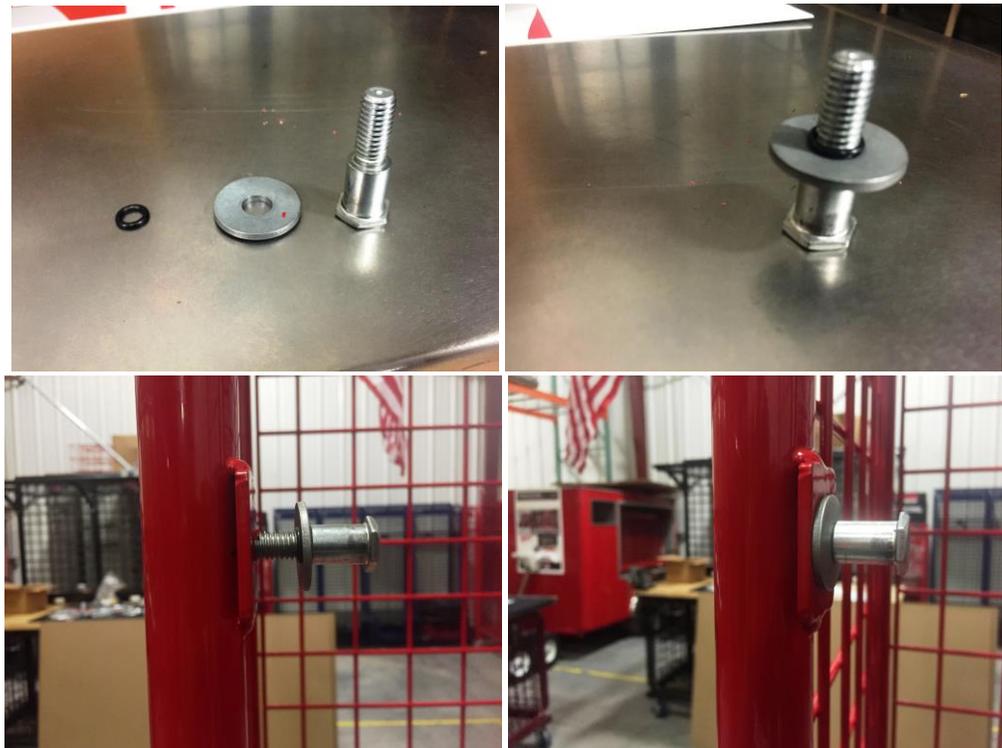

Step 7. Attaching door latch assembly per door. Grab (1) door latch and insert into door frame. (See photo) Next grab (1) 1/4-20x1-1/2" bolt, (1) .735x2810 nylon washer, (1) latch plate. Next, thread 1-1/2" bolt into top hole of door frame. Next, grab nylon washer and place washer between door latch, and latch plate. Now thread bolt through plate and thread on 1/4 lock nut. (Do not over tighten this lock nut). Next grab (2) 1/4-20x1" bolts and thread bolts into bottom two holes. Now tighten these bolts. (See photos) Adjust door latch to match striker bolt if necessary.

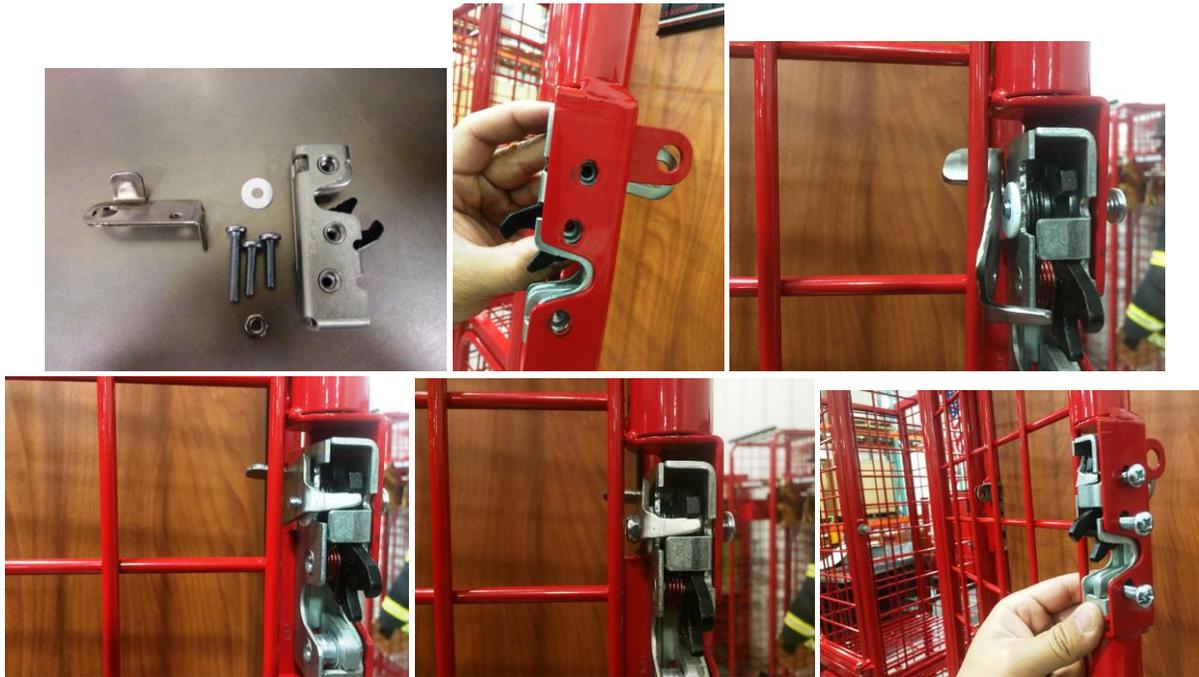

Your locker is now assembled.

